



(800) 233-1294

www.kimballmidwest.com

83-1574


QUANTUM PRO EXTREME TACTICAL LED FLASHLIGHT

The 83-1574 light comes with an extreme high power CREE® XML-2 LED which offers exceptional illumination up to 700 lumens. The forward "Click" switch offers a momentary on by slightly depressing the switch and locks on with a complete push. Triple mode design provides high power, low power, and strobe operation. The tactical shape allows a secure tactical hold, a "cigar" hold, or a conventional grip. A built-in anti-roll ring prevents the light from rolling on angled surfaces.

INSTALLATION:

Note: Batteries not included. Requires (2) 123A batteries (83-1441).

1. Install two (2) 123A lithium batteries in EXACT (+/-) direction into the barrel as below.

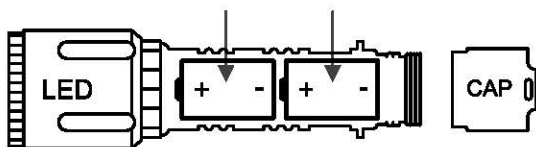

⚠ DANGER

Installing batteries in reverse will cause the batteries and the light to short circuit. This will damage the light and batteries, and can cause battery explosion.

2. Screw on the tail cap and tighten.

OPERATING INSTRUCTIONS:

1. Momentary On:

- a) Slightly depress the switch button.
- b) Release the switch button to off.

2. Constant On:

- a) Completely push down the switch button until it clicks on.
- b) Push down the switch button again to switch off.

3. Triple Mode Operation:

- a) With the light being in the constant on position, quickly click the switch button twice; the light will transfer to **Low Power** mode.
- b) With the light being in the Low Power mode, quickly click the switch button twice; the light will transfer to **Strobe** mode.

c) With the light being in the Strobe mode, quickly click the switch button twice; the light will transfer to **High Power** mode.

d) Whatever mode the light is in, click the switch button once to switch the light off.

⚠ WARNING

Do NOT shine directly into anyone's eyes.

⚠ WARNING

Do NOT run on high for more than 5 minutes as this may cause overheating and damage to the light. If the light gets hot, shut the light off until it cools before turning back on.

⚠ WARNING

Low battery power will result in loss of function on the flashlight. If this occurs, replace with 2 new batteries.

SPECIFICATIONS:

LED	CREE® XML-2
Work mode.....	High power, Low power, Strobe
Brightness	Max. 700 lumens on full power, 35 lumens approx. on low power mode.
Battery Size	2x123A (not included)
Run Time	100 minutes approx. on high power mode, 45 hours approx. on low power mode.
Overall Length	5-5/8"
Head O.D.	1-1/2"
Net Weight	4.8 oz. (excluding batteries)

MAINTENANCE:

1. Remove the batteries if you don't need to use the flashlight for several weeks or more.
2. Switch off the light and wait until the light has cooled down before you clean the optical lens or the housing.
3. Do not touch or try to clean the surface of the reflector or high power LED.
4. Lubricate the waterproof o-ring with o-ring lubricant every 3 to 6 months.
5. Keep the bare metal contact areas inside the barrel and those inside the end-cap clean.

⚠ CAUTION

Do not use solvents such as gasoline, turpentine, etc, to clean the unit. Aerosols and other chemicals may fog the clear lens.

⚠ DANGER

DO NOT dispose of batteries in a fire.